

everSOLO T8

# 目录 /Content

**01** 产品简介 P1

**02** 性能参数 P2

**03** 硬件介绍 P2

**04** 基本操作 P3

**05** 系统设置 P8

**06** 信号的连接与设置 P12

**07** 资源下载 P14

**01** INTRODUCTION P15

**02** PRODUCT SPECIFICATIONS P16

**03** HARDWARE P16

**04** BASIC OPERATION P17

**05** SYSTEM SETTINGS P23

**06** CONNECTION AND SETTING P27

**07** DOWNLOADS P28

# 产品简介

“感谢您选择 Eversolo T8，与我们共同追寻声音的纯粹与极致”

T8 是一款专为音响发烧友打造的专业级数字转盘，致力于提供纯净的音质与先进的功能。

它内置了多款全球热门的流媒体服务，并能够很好的播放和管理各种高解析本地音乐，还嵌入了丰富的第三方高解析流媒体音乐服务，

如：Tidal、Qobuz、Highresaudio、Amazon Music、WebDAV、UPnP 等 . . . . .

T8 拥有6 英寸沉浸式绚丽大屏辅以虚拟按键，操作更直观简洁；

T8内部搭载定制的无氧铜环形变压器以及飞秒级的时钟系统，确保清晰动态的音频输出。

T8作为一款参考级的数字音源，支持多种拥有隔离功能的数字输出接口：如USB Audio、同轴、光纤、AES/EBU、IIS；


使用本机器之前建议您先阅读本说明，以便您正确使用产品的所有功能。

# 产品参数

机身材质	铝合金
显示屏	6 寸LCD 触控显示屏
内存配置	4G DDR4 +64G eMMC
USB 接口	USB3.0*2
有线网络	RJ-45(10/100/1000Mbps)
无线网络	2.4G+5G 双频
SFP 光纤网络	SFP 模块自行购买, 支持单模单纤、单模双纤光模块以及 SFP 电口模块
播放解码	最高支持立体声 DSD512、PCM 768KHz 32Bit
音乐文件格式	DSD(DSF,DFP,SACD ISO Support DST up to DSD512), MP3,APE,WAV,FLAC,AIF,AIFF,AAC,NRG,CUE
网络音乐服务	TIDAL, Qobuz, HIGHRESAUDIO, Amazon Music 等
网络串流与推送	Roon Ready , TIDAL Connect、DLNA 等
USB 音频输出	最高支持立体声 DSD512 Native、PCM 768KHz 32Bit (仅支持UAC 标准的DAC 音频设备)
IIS音频输出	支持8种模式切换 最高支持立体声 DSD512 Native、PCM 768KHz 32Bit
同轴输出	最高支持立体声 PCM 192KHz 24Bit、Dop64
AES/EBU	最高支持立体声 PCM 192KHz 24Bit、Dop64
控制方式	屏幕触摸控制、遥控器、Android/iPhone/iPad APP 控制
网盘	WebDav、UPnP
电源及额定功率	AC 110~240V 50/60Hz 功耗: 20W
包装附件	电源线*1、遥控器*1、用户手册*1


# 硬件介绍

## 后背板

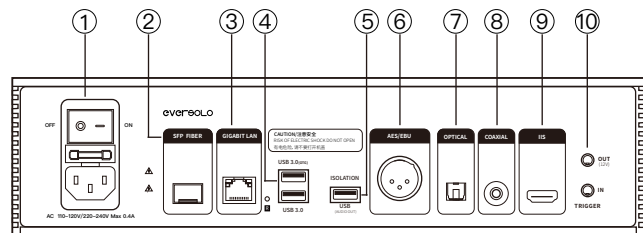

- 1、电插座/开关
- 2、SFP光网络接口
- 3、千兆以太网网络接口
- 4、USB 3.0 \*2 OTG: 连接外接移动存储 / 光驱 /PC 传输 (在设置 - 通用 -USB OTG 定义)
- 5、USB(ISOLATION-Audio out): USB 音频隔离输出, 用来连接音频设备 (DAC)
- 6、AES/EBU输出: 用来连接解码器, 合并式功放
- 7、光纤输出: 用来连接解码器, 合并式功放
- 8、同轴输出: 用来连接解码器, 合并式功放
- 9、IIS数字音频输出: 用来连接解码器
- 10、触发输入/输出: 用来连接连接解码器、合并功放, 实现联动唤醒

## 前面板

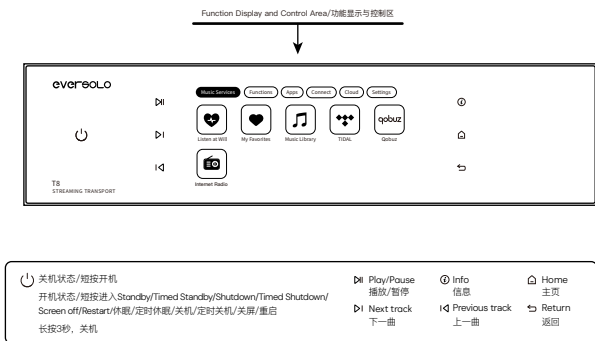

## 开关机功能操作



# 基本操作

## 主界面介绍



主功能栏：显示音乐服务、功能、应用、音乐串流、网盘、设置

## 音乐播放器

Eversolo T8 内置高清数字音乐播放器，本地音乐库，移动硬盘，局域网NAS以及流媒体中的高清无损音乐，点击右侧info按钮，进入音乐播放器，该界面显示当前播放曲目的信息、进度以及控制按钮



## 按钮功能说明

**收藏：** 当前播放的歌曲添加到我的收藏

**播放控制：** 上一曲/下一曲、暂停/播放控制

**播放模式切换：** 列表循环、单曲循环、随机播放、顺序播放模式的切换

**播放队列：** 查看当前播放曲目所在分类中的所有音乐播放队列，比如从艺术家进入选择一个艺术家分类下的单曲，此时播放队列就是该艺术家下的所有曲目清单，其它分类单曲、专辑、收藏、我的歌单等同理

## 网络连接

使用播放功能前，请确保设备已成功联网。本机支持有线网络和 WiFi 连接，您可通过以下路径进行设置：进入设置菜单 > “网络设置” > “WiFi”/“有线网络”；根据实际情况选择并配置对应的网络连接方式，确保设备正常访问互联网



## 输入与输出选择

根据实际设备连接情况不同，需要选择对应的输入输出。设置菜单 > “输入输出”>进行设置



## 音乐服务

**音乐服务：** 包含了音乐库，随心听、音乐收藏、流媒体、音乐APP，其中流媒体、音乐APP需要自己注册账号，在本机上登录即可播放流媒体、音乐APP和网络云里面的音乐

## 音乐库的使用

音乐库可以管理和分类添加到的本地音乐，使用前需点击“添加曲库”，添加包括本地内存、外部存储设备、网络SMB以及网络NFS；



添加完成后，T8的文件系统会对添加的音乐文件按照单曲、艺术家、专辑进行分类



## 在线音乐服务

在线音乐服务包含了流媒体、音乐APP，其中流媒体、音乐APP需要自己注册账号，在本机上登录即可播放流媒体、音乐APP和网络云里面的音乐



注意：\* 内置网络音乐服务应用，取决于各音乐平台认证的进度，请以实际固件为准，后续还将通过固件升级添加更多的网络音乐服务


## 功能


功能选项: 包含CD播放/抓轨、文件管理、EQ、房间校准、传歌



## CD播放与抓轨

本机支持外挂USB移动光驱，不仅支持音乐CD光盘的播放，还可以通过抓轨的方式无损的保存CD音频数据到本地，**CD播放的步骤**：进入全部应用 >“CD”播放

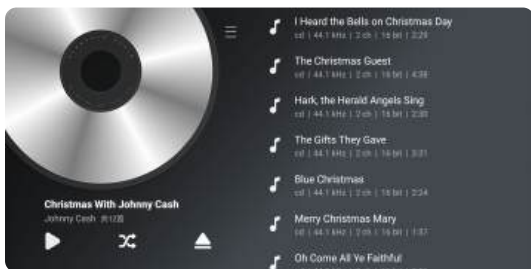


**CD抓轨的步骤**：进入全部应用 >“CD”抓轨，点击“”可更改音乐文件保存的路径，支持保存到本地存储、移动存储以及局域网NFS、SMB设备里



**注意**：\* 本机抓轨的文件支持两种保存格式：WAV、FLAC

## 文件管理器的使用

文件管理器用于管理本地存储、移动存储设备里面的文件以及设置，还支持局域网访问NFS、SMB的服务。支持文件复制、粘贴、删除等操作可对文件整理排序，或点击“”可进行文件管理操作



## EQ配置

本机为内置播放器以及数字音频输出接口提供数字信号处理器（EQ），可以根据个人听感，调节参量均衡器、高低通滤波器、响度、动态范围控制压缩器以及左右声道延时；T8新加入了房间校准功能，针对房间内的声学特性进行EQ调整，以改善音频设备的音质表现



**注意**：\* PEQ功能可用于IIS、光纤/同轴/AES、USB DAC输出。

## 房间校准



\*请扫描二维码查看教程

## 传歌

请确保电脑和设备在相同局域网内，进入功能菜单 >“传歌”，根据菜单说明通过电脑向本机传输歌曲，可在“音乐目录”里设置歌曲保存的目录



## 应用

可以查看并卸载本机的第三方应用，并支持安装第三方音乐APP。把下载的APP应用安装包拷贝到移动存储设备，进入文件管理，找到下载好的安装包，点击安装即可。



注意：\*本机推荐使用平板端的第三方应用

## 音乐串流

支持 TIDAL Connect、DLNA、Squeeze Connect 等多种串流协议。请确保手机或电脑与设备处于同一局域网内，即可通过对应协议将音乐流媒体内容直接推送至设备播放。



## 云盘

云盘包含了UPnP、WebDAV等其它第三方云盘、需要自己注册账号，在本机上登录即可播放云盘所存放网络云盘里面的音乐



# 设置

## 系统设置

系统设置包括：输入输出设置、音频设置、播放设置、显示设置、网络设置、手机控制、开机向导、其它设置、关于以及系统升级

注意：\* 需要数字输出（比如:USB, SPDIF输出），请将音量调到最大。



## 音频设置

进入设置菜单 >“音频设置”，可对IIS、光纤/同轴/AES、USB DAC、音量控制进行设置



## 播放设置

进入设置菜单 > “播放设置”，可对播放模式，CD自动播放、无缝播放、回放增益模式，开机自动播放队列、开机自动打开播放界面等进行设置



## 显示设置

进入设置菜单 > “显示设置”，可以根据实际需要设置触摸按键、屏幕亮度、主题、屏保、VU表显示模式、频谱、播放详情

**触摸按键：**根据需要设置开关按键以及操作按键的亮度以及节能模式

**屏幕亮度：**根据需要设置本机屏幕显示的亮度等级

**主题：**可选择两套主题简约以及经典

**屏保：**选择在一段时间没有操作机器，本机自动进入屏保状态，直到系统检测到操作显示屏，系统将自动退出屏保状态。按机器电源键也可退出屏保


**屏保模式：**本机预设了9种屏保模式，可根据个人偏好设置不同的模式

**VU表：**根据个人喜好，选择播放界面不同的VU表风格



## 主界面样式

主界面样式可通过进入设置菜单 > 显示设置，进行“简约”与“经典”两种风格不同界面切换

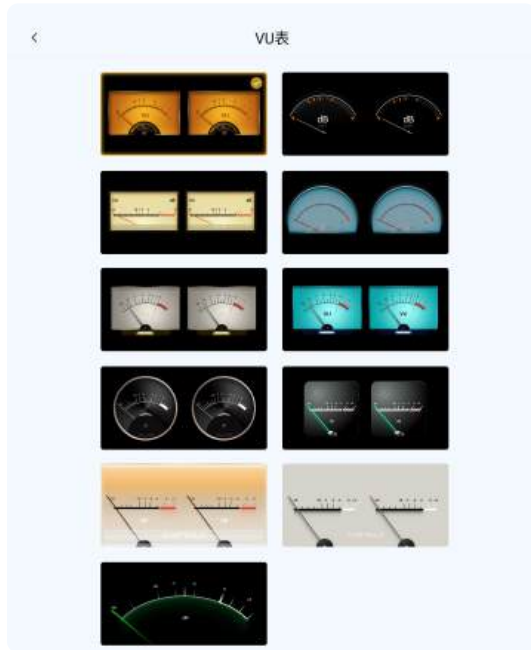

## 手机控制

Eversolo T8支持通过手机APP进行控制，进入设置 > “手机控制”，扫描二维码下载并安装“Eversolo Control”；也可以在官网或者本说明书资源下载页面下载并安装手机控制APP



## 手机控制APP

安装好APP后请确保本机与手机连接在同一个局域网，再打开APP，选择T8设备名称，然后下一步添加设备即可。连接成功后，即可进入控制界面



## 其它设置

### 菜单语言设置

进入设置菜单 >“其它设置”>“语言”，根据需要选择界面菜单语言



### 注意:

\* 应用支持安卓（手机）与IOS系统（手机或平板），也可以在快速入门指南扫描对应二维码下载安装

\* IOS系统可以在“App Store”搜索“Eversolo Control”下载安装

## USB -OTG 端口功能设置

本机支持将USB OTG端口配置成USB OTG模式，方便电脑通过USB数据线连接T8进行本地文件的拷贝和管理。进入设置菜单 >“其它设置”>“USB OTG端口”>“PC文件传输”



## 系统升级

进入设置菜单 >“系统升级”，或“关于”点击“软件版本”进入升级界面，升级的方式有两种：在线升级、本地升级



## 在线升级

连接网络后，进入设置菜单 >“系统升级”或“关于”>“软件版本”，点在线升级，将通过网络获取最新升级固件，按照屏幕提示完成升级，升级完成等待机器自动重启

## 本地升级

通过官网下载EVER SOLO T8 固件升级包至U盘中，将U盘连接到机器USB A型端口，再打开本机设置菜单 >“系统升级”>或点关于“软件版本”，点本地升级选择升级文件包，按照屏幕提示完成升级操作，升级完成等待机器自动重启

### 注意：

- \* 升级过程中请勿拔掉U盘或将机器断电操作
- \* 建议使用FAT32格式U盘进行升级
- \* 下载的升级文件包不需要解压

# 信号的连接与设置

T8 数字音频输出，包括了USB音频、IIS、同轴数字音频输出


## USB 输出连接

使用USB音频数据线，插入本机“USB AUDIO”端口，连接外部DAC的USB输入口，进入设置 >输入输出“内置播放器”，输出端口选择“USB DAC”

### ISOLATION



USB Type-A 转 Type-B 音频数据线



USB Type-B 音频解码器

注意:\* USB音频输出最高支持DSD512 Native、PCM 768KHz 32Bit




# 资源下载

产品固件升级，USB驱动程序及手机控制APP的下载，请访问官网:www.eversolo.com，在下载中心页面自行下载。下载驱动后请解压缩安装包，双击exe安装文件，然后按照屏幕说明完成安装



手机控制 App

\*推荐使用手机浏览器扫描二维码



EVERSOLO艾索洛

EVERSOLO艾索洛

艾索洛EVERSOLO

## 特别说明:

微信公众号为了提升用户体验，艾索洛会不定期对产品的固件进行升级。本说明内容可能与产品实际使用存在差异，本机功能或者参数如有调整，恕不另行通知。更多使用方法，请访问官方网站：[www.eversolo.com](http://www.eversolo.com) 进行查阅

## 安全警示:

- 1、本设备不得遭受水溅或水滴，不得在设备上放置类似花瓶一类装满液体的物品
- 2、本设备断开电源装置为电源输入插头或背面电源开关，为了便于操作，电源插头或电源开关附近不能被其他物体阻挡
- 3、本设备为I类产品，使用此产品须确保要有良好的接地措施

# Introduction

“Thank you for choosing the Eversolo T8 to join us in the pursuit of pure and ultimate sound.”

The T8 is a professional-grade streaming transport designed for audiophiles, dedicated to delivering pure audio quality and advanced features.

It supports mainstream global music services—including TIDAL, Qobuz, HIGHRESAUDIO, Amazon Music, Deezer, and so on—while also delivering exceptional playback and management of high-resolution local music files.

Featuring a 6-inch premium display complemented by virtual buttons, the T8 ensures intuitive and effortless operation. Inside, it is equipped with a custom oxygen-free copper toroidal transformer and a femtosecond-grade clock system, guaranteeing clear and dynamic audio output.

As a reference-level digital source, the T8 supports multiple isolated digital output interfaces, such as USB Audio, coaxial, optical, AES/EBU, and IIS.


It is advised to read this manual to make sure the product's features are applied correctly.

# Product Specifications

Chassis Material	Aluminium alloy
Display	6" LCD Touchscreen
Storage	4G DDR4 +64G eMMC
USB Ports	USB3.0*2
Ethernet	RJ-45(10/100/1000Mbps)
Wi-Fi	Dual-Band Wi-Fi 2.4G+5G
SFP Fiber Network	SFP modules need to be purchased separately; Supports single mode single-fiber, single-mode dual-fiber optical modules, as well as SFP electrical port modules
Streaming Playback	Supports up to stereo DSD512 Native and PCM 768KHz 32-Bit
Music File Formats	DSD(DSF, DFF, SACD ISO Support DST up to DSD512), MP3, APE, WAV, FLAC, AIF, AIFF, AAC, NRG, CUE
Music Services	TIDAL, Qobuz, HIGH-RESAUDIO, Amazon Music etc.
Music Streaming	Roon Ready , TIDAL Connect, Qobuz Connect, DLNA etc.
USB Audio Output	Supports up to stereo DSD512 Native, PCM 768KHz 32Bit (Only supports DAC audio devices compliant with UAC standards.)
IIS Audio Output	Supports 8-mode switching Supports up to stereo DSD512 Native, PCM 768KHz 32Bit
Coaxial Output	Supports up to stereo PCM 192KHz 24Bit , Dop64
AES/EBU	Supports up to stereo PCM 192KHz 24Bit , Dop64
Control Methods	On-screen touch control, Android/iPhone/iPad APP control, Remote Control
Sharing Protocols	WebDav, UPnP
Power Supply	AC 110-240V 50/60Hz Rated Power: 20W
Packing List	Power Cable*1, Remote Control*1, User Manual*1


# Hardware

## Rear Panel

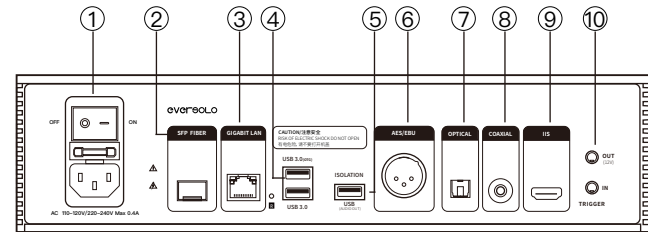


1. Power socket/switch
2. SFP Fiber network interface
3. Gigabit Ethernet network socket
4. USB 3.0\*2 OTG: For connecting external storage devices/optical disc drives/PCs (Settings – General – USB OTG)
5. USB (ISOLATION–Audio out): Isolated USB audio output. For connecting audio devices (DAC)
6. AES/EBU output: For connecting decoder or integrated amplifier.
7. Optical output: For connecting decoder or integrated amplifier.
8. Coaxial output: For connecting decoder or integrated amplifier.
9. IIS digital output: For connecting decoder.
10. Trigger in/out: For connecting a decoder/integrated amplifier to enable power-on/off synchronization.

# Front Panel

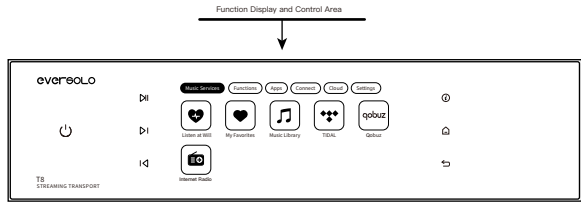


⏻ Power-off state/Short press to power on/ Power-on state short press to enter Standby/Timed Standby/Shutdown/Timed Shutdown/Screen off/Restart  
⏸ Play/Pause ℹ Info 🏠 Home  
⏮ Next track ⏪ Previous track ⏭ Return  
 Long press for 3 seconds to power off

# Power Button Functions

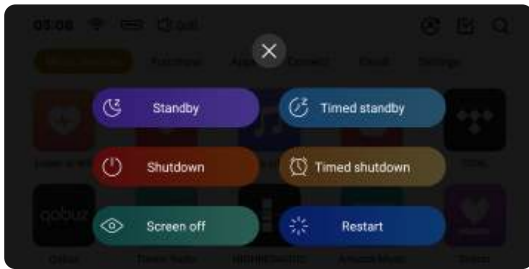

# Basic Operation

## Home Page Introduction

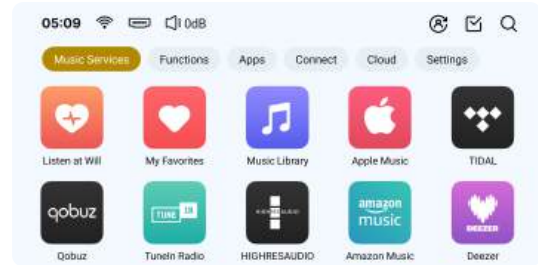

**Function entrance:** Displays Music Services, Functions, Apps, Connect, Cloud, Settings.

## Music Player

The Eversolo T8 features a built-in high-resolution digital music player capable of playing audio from multiple sources including local music library, external hard drives, NAS devices on your local network, and lossless streaming services. Tap the "info icon" in the top-right corner to enter into Music Player interface and see currently playing tracks, progress and control icons.



## Description

**Favorite:** Add the currently playing track to My Favorites.


**Playback Controls:** Previous/Next track, Pause/Play.

**Switch Play Mode:** Switch play modes between list loop, single loop, shuffle play and order play.

**Play Queue:** A list of all tracks currently selected to be played, such as all tracks by a certain artist. Other categories (Songs/Albums/Favorites/Playlists):Queue automatically compiles all items within the selected category


## Network Connection

Before using the playback function, please ensure the device is successfully connected to the network. This device supports both wired and Wi-Fi connections. You can configure the connection by following these steps: Go to the Settings–Network Settings–WIFI/Wired network. Choose and configure the appropriate network connection based on your situation to ensure the device can access the internet.

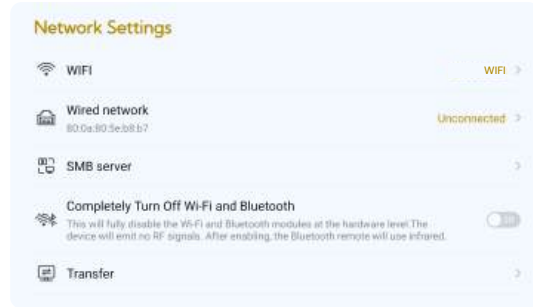

## Source Selection

Navigate to “Settings > Source” to configure settings based on your connected devices.

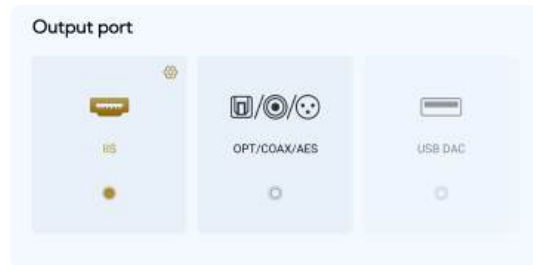


## Music Service



**Music Services:** Includes Music Library, Listen at Will, My Favorites, streaming services, and music apps. Log in your account to play music from third-party apps and streaming services.

## Music Library

The music library allows you to manage and categorize local music. Tap "Add Library" to add music from local storage, external storage devices, SMB, or NFS networks.

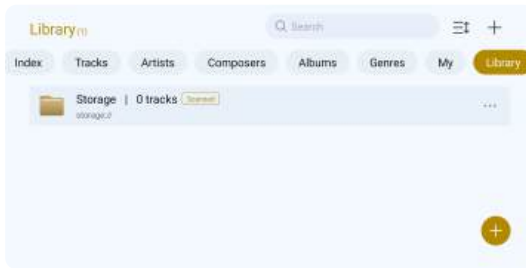


Eversolo T8 will categorize the added music files by track, artist, album etc.

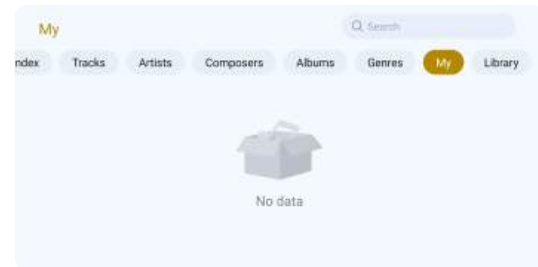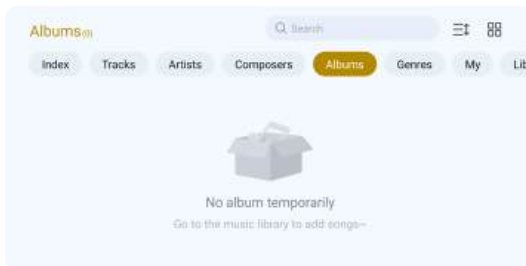

## Music Service Usage

**Music Services:** Includes Music Library, Listen at Will, My Favorites, streaming services, and music apps. Log in your account to play music from third-party apps and streaming services.

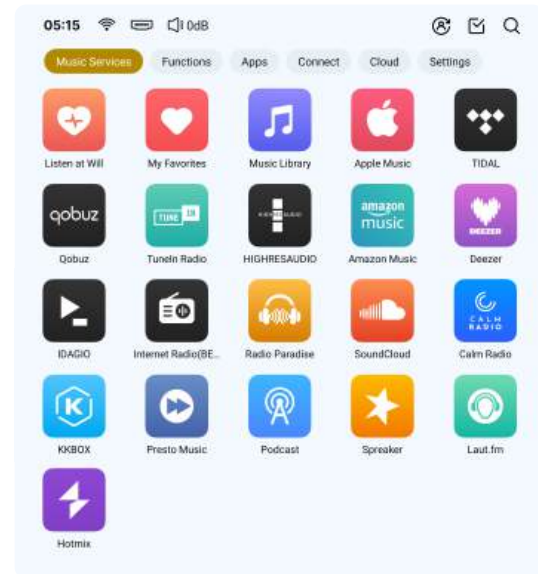

**Note:** \* More native music services will be available, please check the official website for firmware updates.

## Function

**Options:** Files, CD Player/Ripper, EQ, Room Correction and Transfer song.




## CD Playback & Ripping

By connecting with a USB CD-ROM, the device can both play music from CD and rip music files from CD and save to local storage.

**CD playing instructions:** Navigate to "Functions > CD player"




**CD ripping instructions:** Navigate to "Functions > CD ripper" to start CD ripping. Click  to change the path for saving music files, supports local storage, removable storage, and NFS/SMB devices in LAN.



**Note:**\* The device supports WAV and FLAC for ripping files.

## File Manager

The File Manager manages files in local storage and removable storage devices, and supports LAN access to NFS and SMB services. It allows file operations (copy, paste, delete), organizing/sorting files, or performing file management tasks via .



## EQ


The EQ function works for the internal player and digital audio outputs, allowing users to customize parametric equalizer, high and low pass filters, loudness, dynamic range, compressor, and left-right channel delay.

T8 has introduced a new room correction feature, which adjusts the EQ based on the acoustic characteristics of the room to improve the audio performance of the equipment.



**Note:**\* The PEQ function works for IIS, coaxial, optical, AES and USB DAC output.

## Room Correction

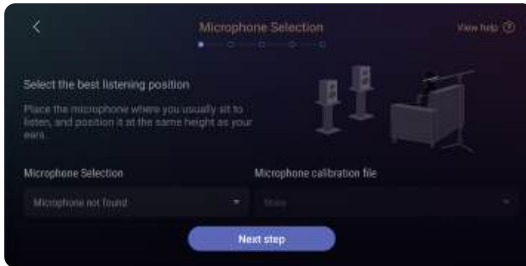

\*Please scan the code to check the guide.

## Transfer

Access “Functions > Transfer songs” to transfer music files from computer to this device according to the description. Make sure computer and the device are on the same network, choose a path to save songs in Music Directory.



## Apps


You can view, install and uninstall third-party apps. To install third-party apps, firstly download the APK file and copy it to a removable hard drive, insert the hard drive into this device and find APK file in File Manager, then install it by one click.



**Note:** \* It is recommended to install tablets apps.


## Music Connect

Supports multiple streaming protocols including TIDAL Connect, DLNA, Qobuz Connect and Squeeze Connect. Ensure your phone or computer is connected to the same local network as the device, and you can stream music directly to it via the corresponding protocol.

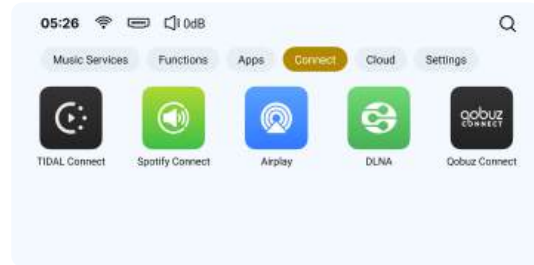

## Cloud

Includes UPnP, WebDAV, and other third-party cloud storage services. You may create and log in to your own account on the device to play music stored in these cloud platforms.

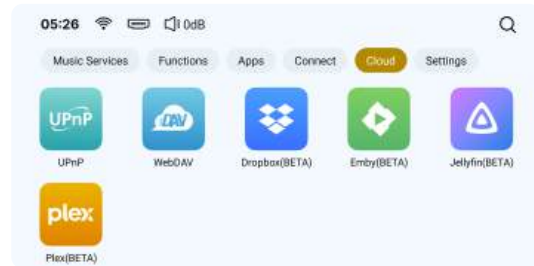


# Settings

## System Settings

**Settings:** Source, Audio Settings, Playback Settings, Display Settings, Network Settings, Phone Control, Update, SetUpWizard, Other Settings, About.

**Note:** \* For digital outputs (e.g.,USB AUDIO,COAXIAL/OPTICAL), set the volume to maximum.

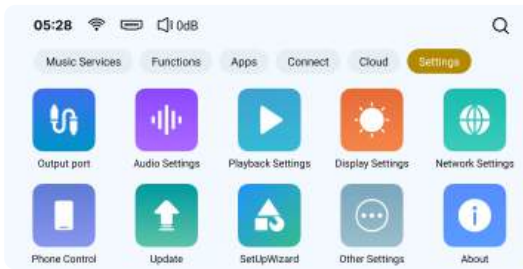


## Audio Settings

Navigate to “Settings > Audio Settings” to configure settings for IIS, optical, coaxial, AES and USB DAC output, and Maximum volume limit.



## Playback settings

Navigate to “Settings > Playback Settings” to configure Playback Mode, CD Auto Play, Gapless playback, ReplayGain source mode, Auto-play Queue on Startup, and Auto Open Playback screen on Startup.

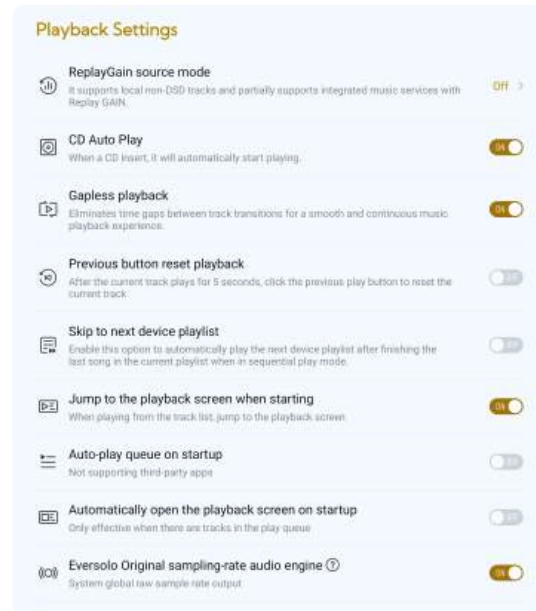

## Display Settings

Navigate to "Settings > Display Settings" to adjust touch button, screen brightness, screensaver, screensaver modes, VU meter display modes, spectrum, theme and play details.

**Touch button:** Adjust brightness and enable power-saving mode for both power and function touch buttons as needed.



**Screen Brightness:** Adjust the brightness level of the device screen.

**Theme:** Choose between two interface styles – "simple" and "Classic".

**Screensaver:** Enable the system to enter screen saver mode after inactivity.  
Exit by pressing the power button or touching the screen.


**Screensaver Modes:** Choose from 9 preset screen saver styles.

**VU Meter:** Select different VU meters according to personal preference.

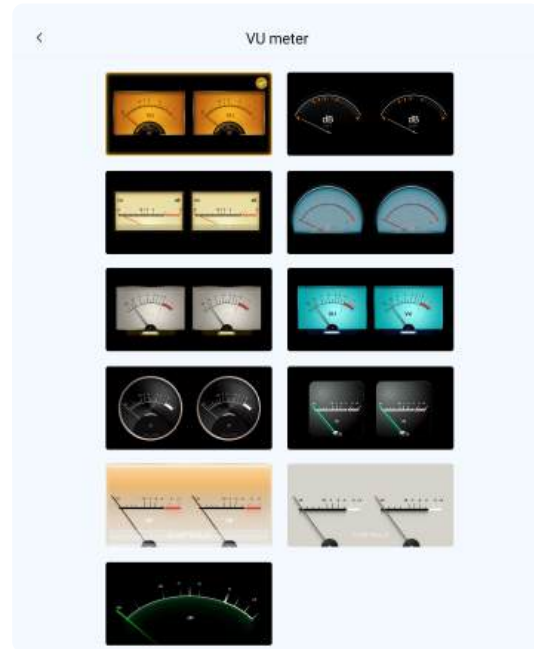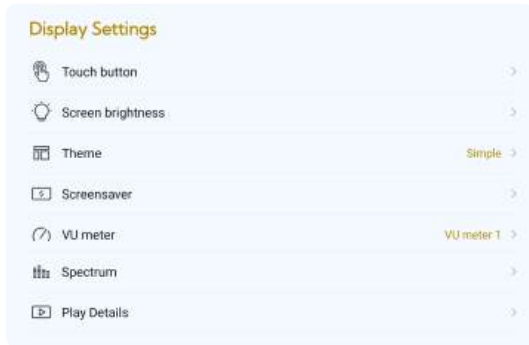

## Theme

Navigate to “Settings > Display Settings > Theme” to switch between “Simple” and “Classic” theme.

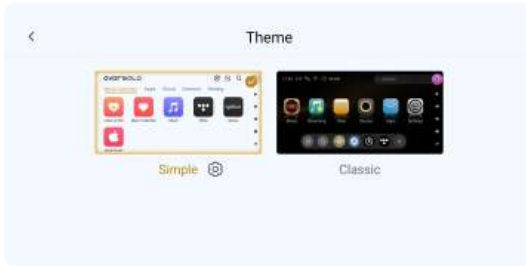



## Phone control

Eversolo T8 supports control via a mobile app. Navigate to “Settings > Phone Control”, scan the QR code to download and install Eversolo Control app. Alternatively, download the app from the official website or the manual.



## Mobile Control App

Ensure the device and phone are on the same local network. Open the app, select device named “T8” to add the device. Once connected, you will access the control interface.

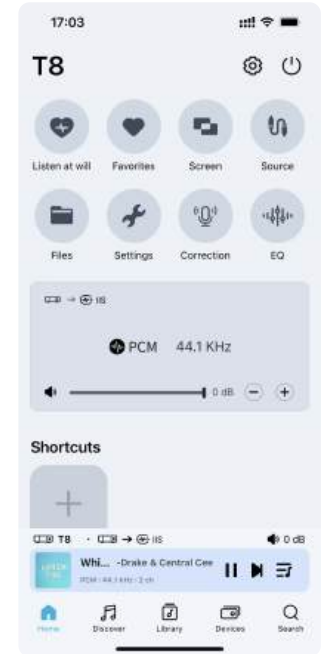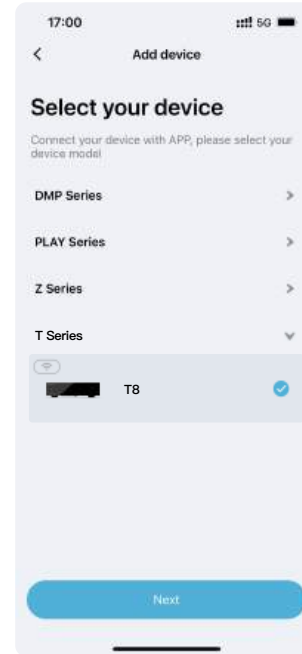

### Notes:

- \* Android (mobile phone) and iOS (mobile phone or tablet) apps are supported. Scan the QR code in the Quick Start Guide for download.
- \* iOS users can search “Eversolo Control” in the App Store.

## Other Settings

### Language

Navigate to "Settings > Other Settings > Language" to choose menu language.



### USB OTG Port

The USB-OTG port can be used to connect with computer by a USB data cable, so that it is convenient to copy and manage local files.

Navigate to "Settings > Other Settings > USB-OTG port > PC file transfer".



## System Update

Navigate to "Settings > Other Settings > Language" to choose menu language.



### Online update

Connect to the internet, navigate to "Settings > Update" or "Settings > About > Version Number", select "Online update," and follow prompts. Wait for automatic restart.

### USB update

Download the firmware update package from the official website to a USB stick. Connect the USB stick to the device's USB-A port. Navigate to "Settings > Update" or "Settings > About > Version Number", select "USB update," and follow prompts. Wait for automatic restart.

#### Notes:


- \* Don't remove the USB stick or power off during the upgrade process.
- \* It is recommended to use a FAT32 format USB stick.
- \* There is no need to unzip the downloaded file package.

# Connection and Setting

Eversolo T8's digital audio output includes USB audio, IIS output port and Coaxial digital audio output.

## USB OUTPUT

Use a USB audio cable to connect the device's USB audio output to the external DAC's USB input. Then navigate to "Settings > Source", select "Internal player" as input, and select "USB DAC" as output.

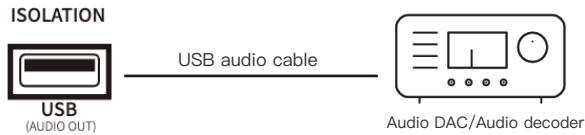


### Note:

\* USB audio output supports up to DSD512 Native and PCM 768KHz 32Bit.

## Coaxial Output

Use a Coaxial audio cable to connect the Coaxial output of this device to the input of an audio decoder or AV receiver.

Navigate to "Settings > Source > Output port" and select "COAX/OPT/AES".



### Note:

\* COAX/OPT/AES output supports up to Stereo PCM 192KHz 24Bit and DOP64.

\* COAX Connection: Use a professional 75-ohm coaxial audio cable for optimal signal transmission.

## IIS Output


Use an HDMI cable to connect the IIS output port on T8 to an external DAC with an LVDS-IIS input port. Go to "Source> Internal Player", and select "IIS" as the output port. T8 supports 8 IIS output modes.

# Downloads

For product firmware upgrade, USB driver and mobile control APP download, please visit the Downloads page on official website : [www.eversolo.com](http://www.eversolo.com) and scan QR code. Please unzip the package after downloading the driver, double click the .exe file and install it by following popup hints.



Phone control



\* Mobile browser QR code scanning is supported and recommended.

## Special note:

In order to improve the user experience, Eversolo will update firmware from time to time. Therefore, this product manual may differ from the actual setting menus of the product. For more tutorials, please visit [www.eversolo.com](http://www.eversolo.com)

## Safety Warning :

- 1.No water splashing or dripping, do not put objects with liquid like vase on the device.
- 2.The power plug and the power switch are used to disconnect power supply, which cannot be blocked by other objects.
- 3.It is Class I device, there must be grounding measures inside the box when using.

